



A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series

Key Features

- Seamless, one-piece lavatory is a cost effective upgrade to traditional fabricated counters with seams
- With fewer plumbing connections, installs faster than traditional counters and sinks
- Easy-to-clean, linear design minimizes flat areas where water could puddle
- 1 person access panel install and removal
- ADA and TAS compliant
- Available in a variety of Terreon® solid surface colors
- Compatible with WashBar® Duo and Verge™ deck-mounted soap dispensers and faucets
- Available with standard flexible bracket design or in wall carrier for various installation types and requirements. Both IAPMO certified to meet or exceed ANSI load requirements.

Specifications

Accommodates one, two, or three users. These units handle washroom traffic quickly and economically. Robust design meets or exceeds the ANSI load requirements. This system can be mounted at different heights to accommodate hand washing for adults, children, young children, and those with disabilities. Meets Enhanced Reach when paired with WashBar Duo. Search CSI 3-part specification on bradleycorp.com for CSI spec format.

Product Compliance

Listed by IAPMO R&T to

- Uniform Plumbing Code (UPC) 
- National Plumbing Code of Canada
- International Plumbing Code (IPC)
- IGC 156
- IGC 127 (WashBar)
- ASME A112.6.1M (In Wall Carrier)

Listed by UL Environment to

- GreenGuard Gold




Complies with

- ADA
- ICC/ANSI 117.1
- TAS
- Enhanced Reach IC A117.1, 606.5 (WashBar Duo)
- NSF/ANSI 372
- CSA B45.5/IAPMO Z124



Sustainability

- Terreon participates in the mindful MATERIALS library

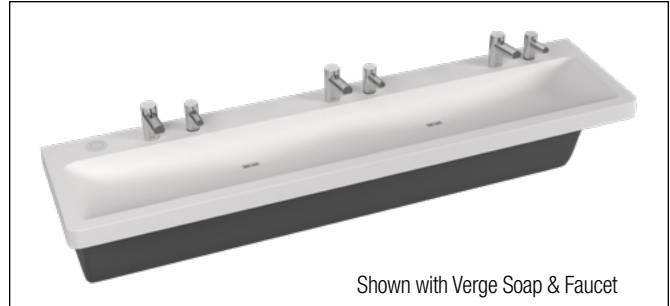

Shown with Verge Soap & Faucet

Finishes

 Click on any color swatch to view as a larger image.

-  Polished Chrome
-  Brushed Black Stainless*
-  Brushed Stainless*
-  Brushed Bronze*
-  Brushed Brass*
-  Brushed Nickel*

*PVD Finishes, see PVD Finishes section.

* PVD Finishes

Physical Vapor Deposition is an intricate, environmentally friendly finishing process that molecularly bonds the finish to the faucet, creating a very hard, durable surface that will not corrode, discolor, or tarnish.

Compatible Bradley Products

- [Verge Coordinated Soap and Faucet](#)
- [WashBar Duo](#)
- [In-Wall Lav Carrier](#)

 This plumbing fixture is designed for hand washing only. It is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.



A WATTS Brand

TLX-3

Express® Lavatory System – TLX Series

Construction

Basin

Constructed of Terreon, a densified solid surface material composed of a bio-based resin. Terreon is resistant to chemicals, stains, burns, and impact. Surface damage can be easily repaired with every day cleansers or fine grit abrasives. Terreon is GREENGUARD® certified as low-emitting materials.

Mounting Support

Offering two robust mounting support solutions to meet diverse installation needs: certified in-wall carrier for high-strength, concealed support, and our standard bracket design that provides flexible stud or wall blocking anchor locations. Both options are IAPMO certified and meet or exceed ANSI load requirements, ensuring durable performance and code-compliant installation.

Access Panel

Unique access panel design pivots on stainless steel brackets which easily allows for one person installation and removal. Standard thumb screw fasteners and vandal-resistant fasteners included as standard. The access panel is composed of high impact polymer so it will not chip, peel, or flake. The fully enclosed vandal-resistant design eliminates the need for plumbing wrap.

Strainer and Drain Assembly

System comes complete with 300 series stainless steel strainers, tailpiece connection and your choice of a combined drain rough-in with one drain connection or individual drain rough-in with two connections.

Vandal Resistance

Water supplies, valving, waste assembly and other optional items are completely concealed within the high impact resistant access panel. Vandal-resistant access panel fasteners included as standard. Terreon bowl material is also highly vandal resistant and repairable.

Faucets*

Choose from our 0.35 gpm (1.30 Lpm), 0.05 gpc (0.25 Lpc) or 0.50 gpm (1.90 Lpm), 0.09 gpc (0.35 Lpc) Verge Faucets – Crestt, Metro, Linea, or Zen Series. Available in 0.35 gpm (1.30 Lpm), 0.05 gpc (0.25 Lpc) or 0.5 gpm (1.90 Lpm), 0.09 gpc (0.35 Lpc), WashBar Duo WBD1 includes soap dispenser and faucet in a single piece casting. Verge faucets and WashBar Duo come as chrome-plated with optional in-stock PVD finishes. Also available are 4" centerset, 8" centerset, and centershank faucet drillings are available for faucets by others. Optional 4" centerset trim plates are available for additional vandal resistance.


Soap Dispensers*

Choose from our Verge Deck-Mounted Soap Dispensers – Crestt, Metro, Linea, or Zen Series. Soap drillings available for soap by others. Also available with WashBar Duo WBD1, foam or liquid soap. WashBar Duo accommodates a 1 gallon cylindrical soap container, provided by others. Verge soap dispensers and WashBar Duo come as chrome-plated with optional in-stock PVD finishes.

*For primary/elementary school applications, Bradley recommends hands-free activation for soap dispensers and faucets in lieu of manual activation to ensure proper reach for kindergarten students. TLX-3 meets Enhanced Reach requirements when paired with WashBar Duo WBD1.


Top View (shown with Verge Soap & Faucet)

(mm)

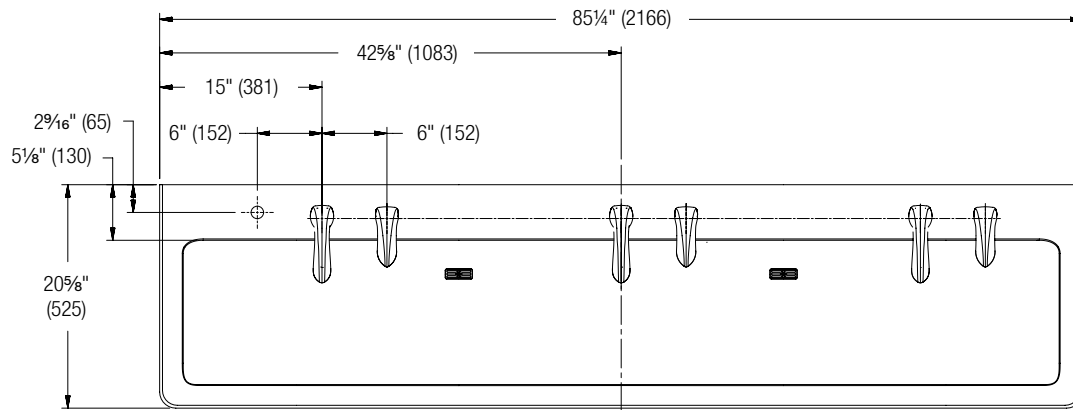

Front View (shown with Verge Soap & Faucet)

(mm)

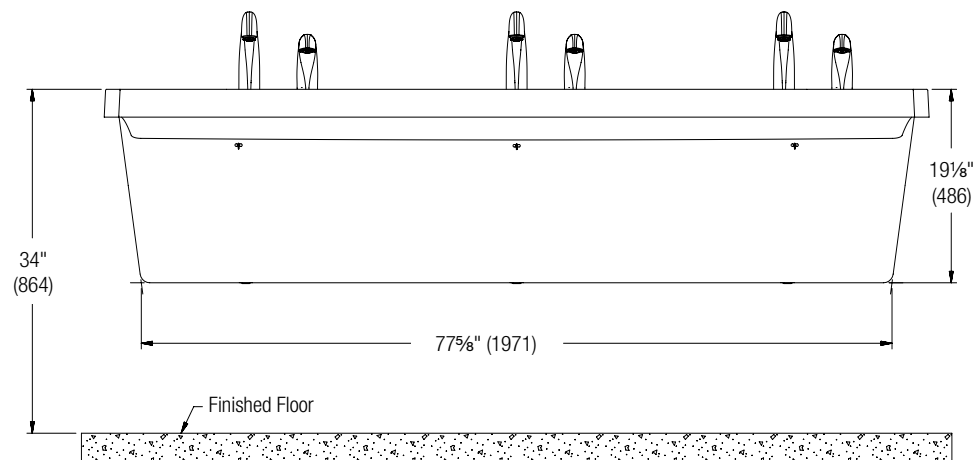




A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series


Top View (shown with WBD1)

(mm)

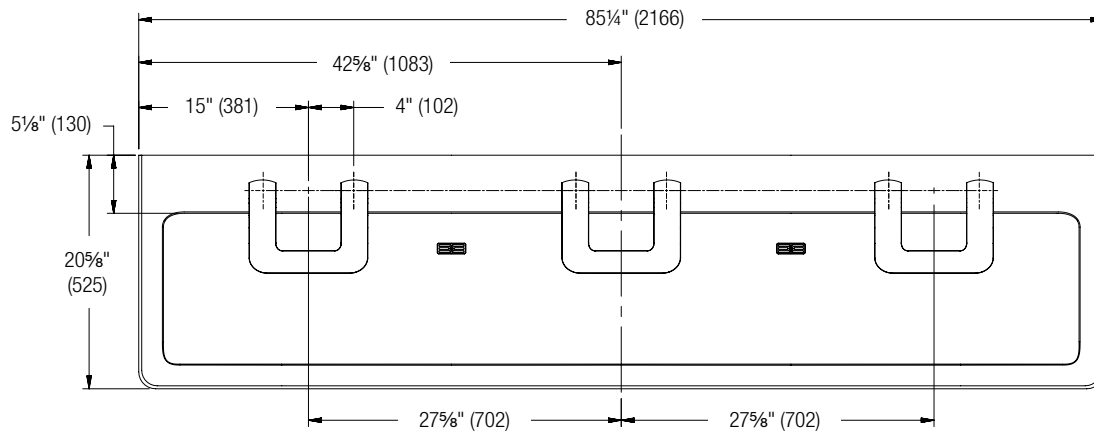

Front View (shown with WBD1)

(mm)

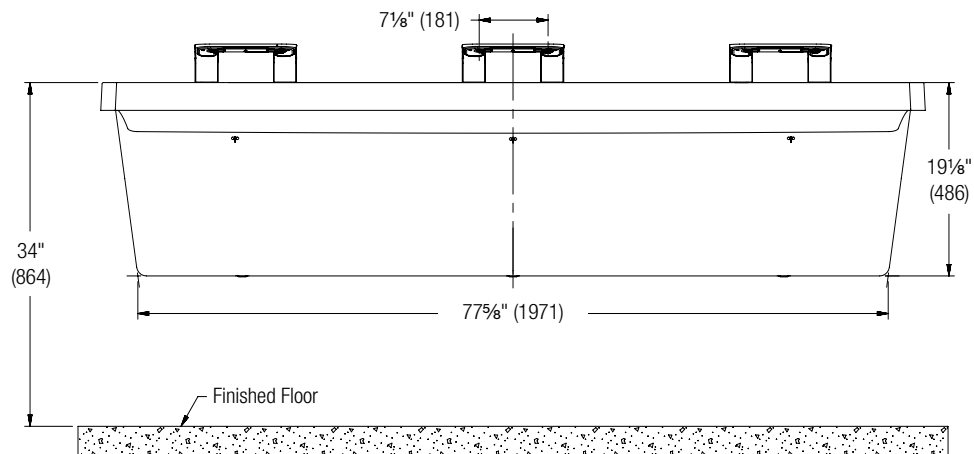




A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series


Side View

(mm)

Standard Height (ADA) – Verge Faucet

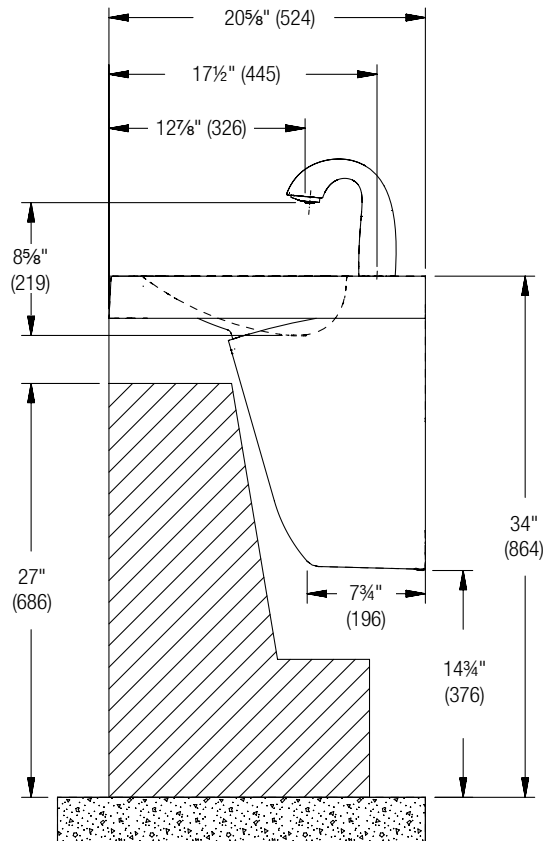

Standard Height (ADA) – WBD1

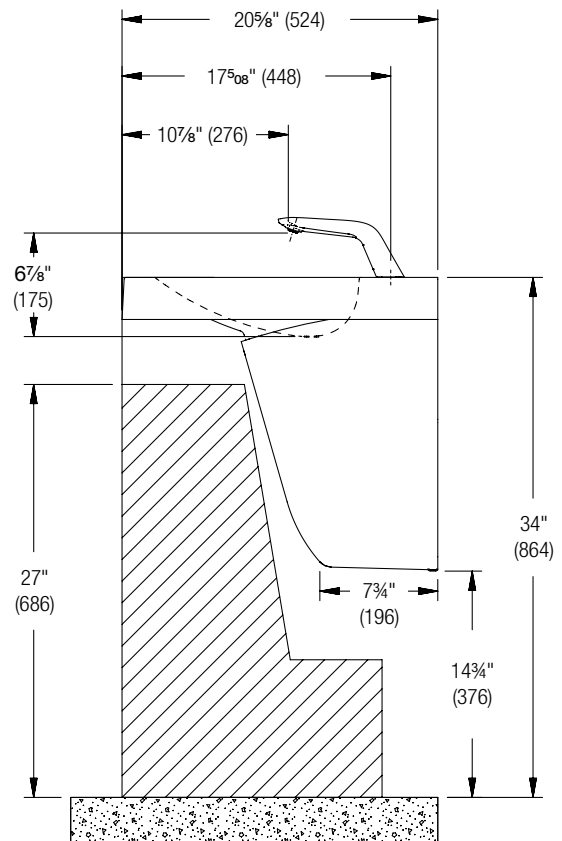

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS	FIXTURE STYLE	NOTES
34"	No Adjustment	Standard ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
31"	*Subtract 3"	Juvenile ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
26"	*Subtract 8"	Junior	For use by younger children where ADA guidelines are not a concern.




A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series


Side View

(mm)

Juvenile Height (ADA) – Verge Faucet

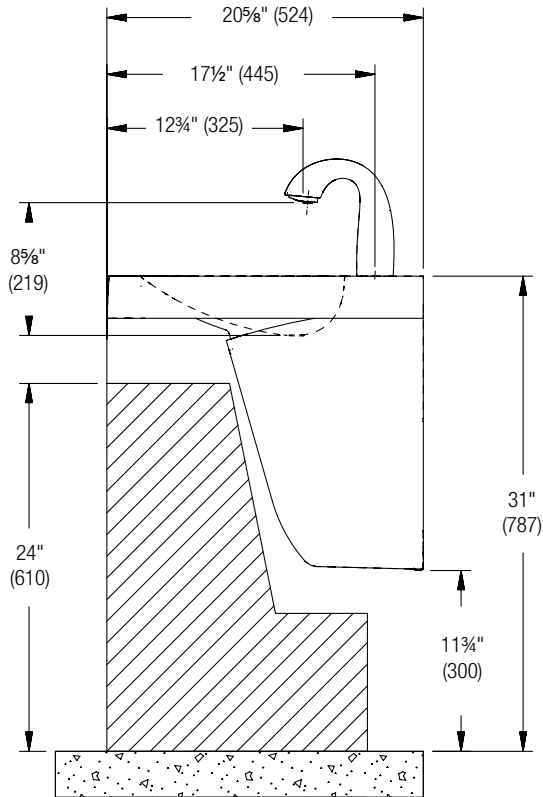

Juvenile Height (ADA) – WBD1

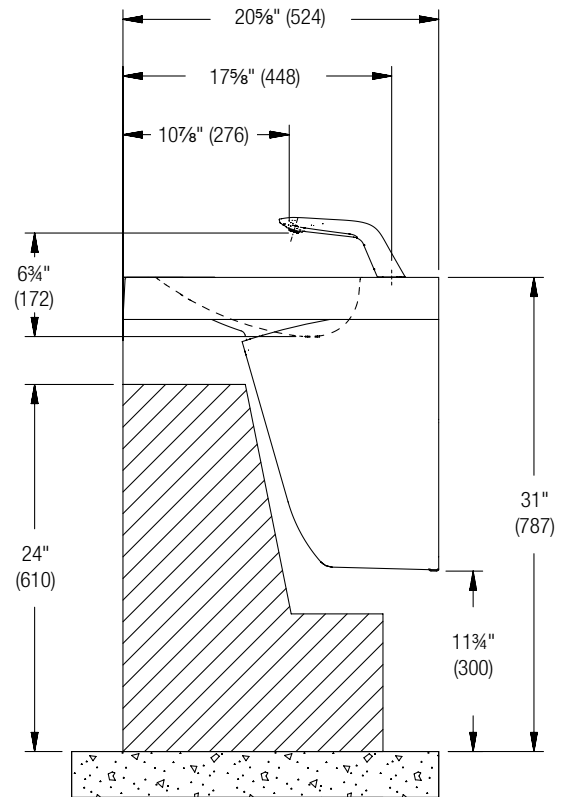

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS	FIXTURE STYLE	NOTES
34"	No Adjustment	Standard ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
31"	*Subtract 3"	Juvenile ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
26"	*Subtract 8"	Junior	For use by younger children where ADA guidelines are not a concern.




A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series


Side View

(mm)


CSA Height – Verge Faucet

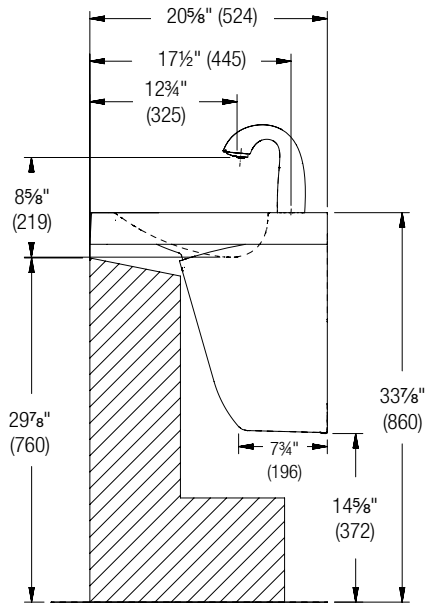


CSA Height – WBD1

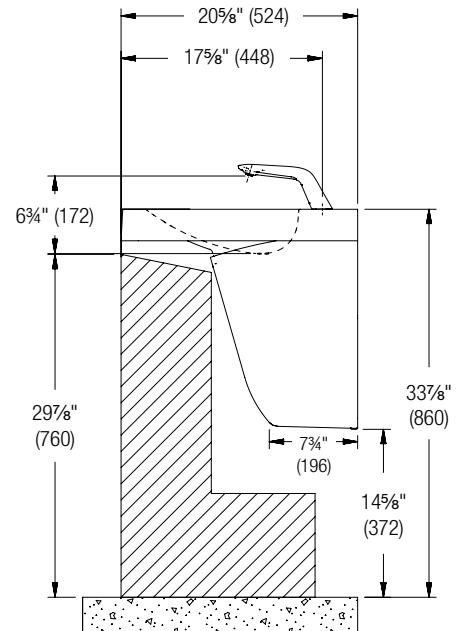

OBC Height – Verge Faucet

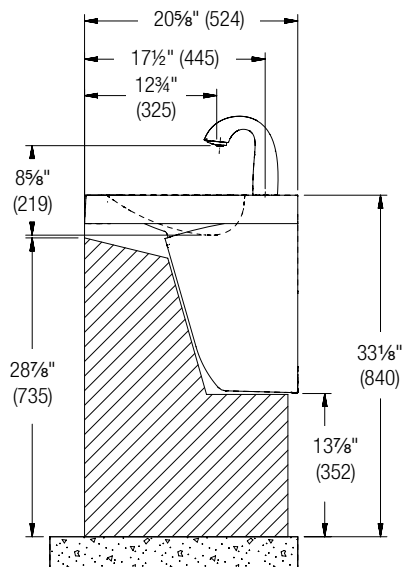

OBC Height – WBD1

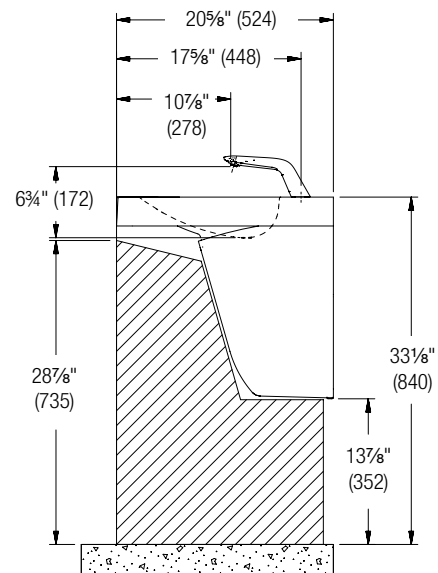

Structural Rough-Ins


(mm)



Mounting for Standard ADA and TAS height shown.



Areas highlighted in gray require sufficient backing compliant with local building codes.

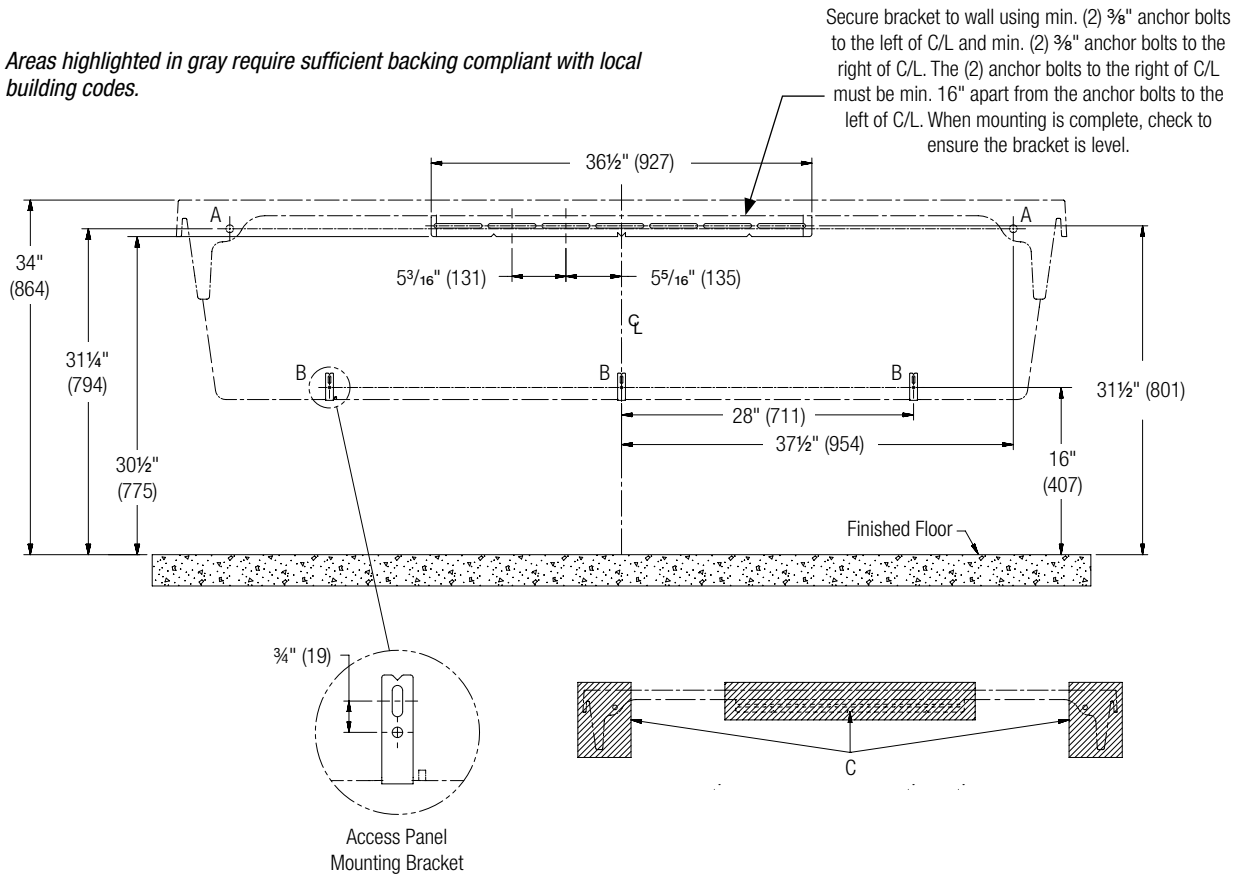

CODE	DESCRIPTION	QTY.
A	Install (1) $\frac{3}{8}$ " wall anchor with a minimum pull-out force of 1,000 lb per local codes at locations shown	2
B	Install (2) wall anchors per bracket with a minimum pull-out force of 100 lb per local codes at locations shown	6
C	Provide structural backing compliant with local building codes.	2

RIM HEIGHT	VERTICAL HEIGHT ADJUSTMENTS	FIXTURE STYLE	NOTES
34"	No Adjustment	Standard ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
31"	*Subtract 3"	Juvenile ADA & TAS	At least one basin must meet dimensional requirements and have proper reach, knee, and toe clearance.
26"	*Subtract 8"	Junior	For use by younger children where ADA guidelines are not a concern.

Plumbing & Electrical Rough-Ins – Combined Waste Option

(mm)




Mounting for Standard ADA and TAS height shown.




Combined waste option is not available for use with WBD1 faucet assembly.



Electric outlet locations shown below reflect potential locations. Refer to page 10 for power supply and outlet information.

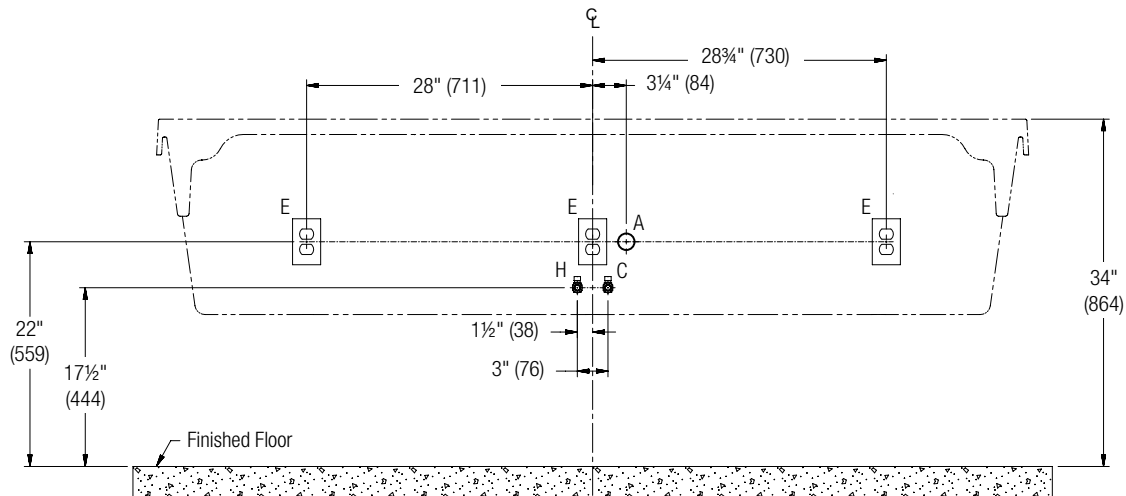

CODE	DESCRIPTION	QTY.
A	1 1/2" NPT Drain, Stub-out 2" from wall, combined waste option	1
H,C	1/2" Nominal (5/8" O.D. Comp.) Hot/Cold supplies, Stub-out 2" from wall	1
E	110V GFI protected electrical outlet (AC faucet and soap only)	3

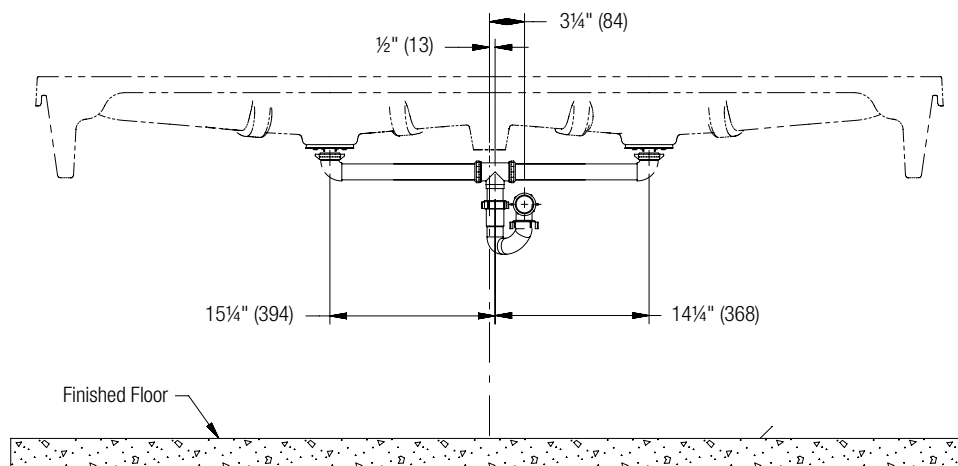



TLX-3 Express® Lavatory System – TLX Series

Plumbing & Electrical Rough-Ins – Individual Waste Option


(mm)



Mounting for Standard ADA and TAS height shown.



Electric outlet locations shown below reflect potential locations.
Refer to the power supply and outlet information below.

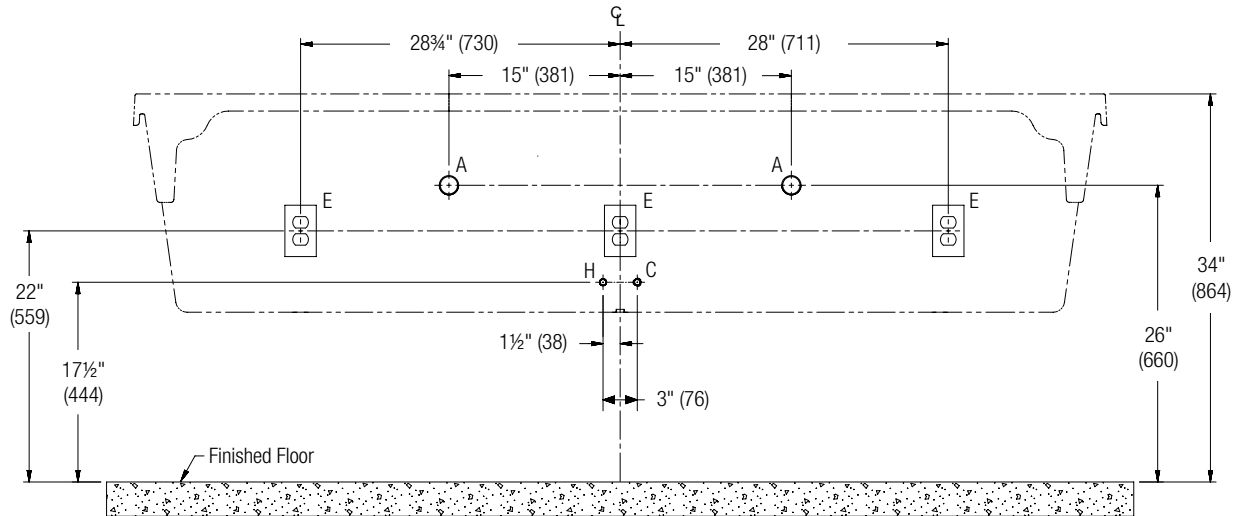

CODE	DESCRIPTION	QTY.
A	1½" NPT Drain, Stub-out 2" from wall, individual waste option (waste arms to be cut in field)	2
H,C	½" Nominal (¾" O.D. Comp.) Hot/Cold supplies, Stub-out 2" from wall	1
E	110V GFI protected electrical outlet (AC faucet and soap only)	2

VERGE SOAP & FAUCET POWER SUPPLY			
	1-Station	2-Station	3-Station
Faucet Only	AC Adapter x 1 1 duplex outlet req.	AC Adapter x 2 1 duplex outlet req.	AC Splitter* x 1 1 duplex outlet req.
Soap Only	AC Adapter x 1 1 duplex outlet req.	AC Adapter x 2 1 duplex outlet req.	AC Splitter* x 1 1 duplex outlet req.
Faucet & Soap	AC Adapter x 2 1 duplex outlet req.	AC Splitter* x 1 1 duplex outlet req.	AC Splitter* x 2 1 duplex outlet req.
Soap & Multi-Feed	NA	NA	AC Splitter* x 1 1 duplex outlet req.
Faucet, Soap, & Multi-Feed	NA	NA	AC Splitter* x 2 1 duplex outlet req.

*AC splitter assembly includes one adapter, one 4-way splitter, and four extensions.



A WATTS Brand


TLX-3 Express® Lavatory System – TLX Series

Plumbing & Electrical Rough-Ins – Verge Soap & Faucet

(mm)



Mounting for Standard ADA and TAS height shown.

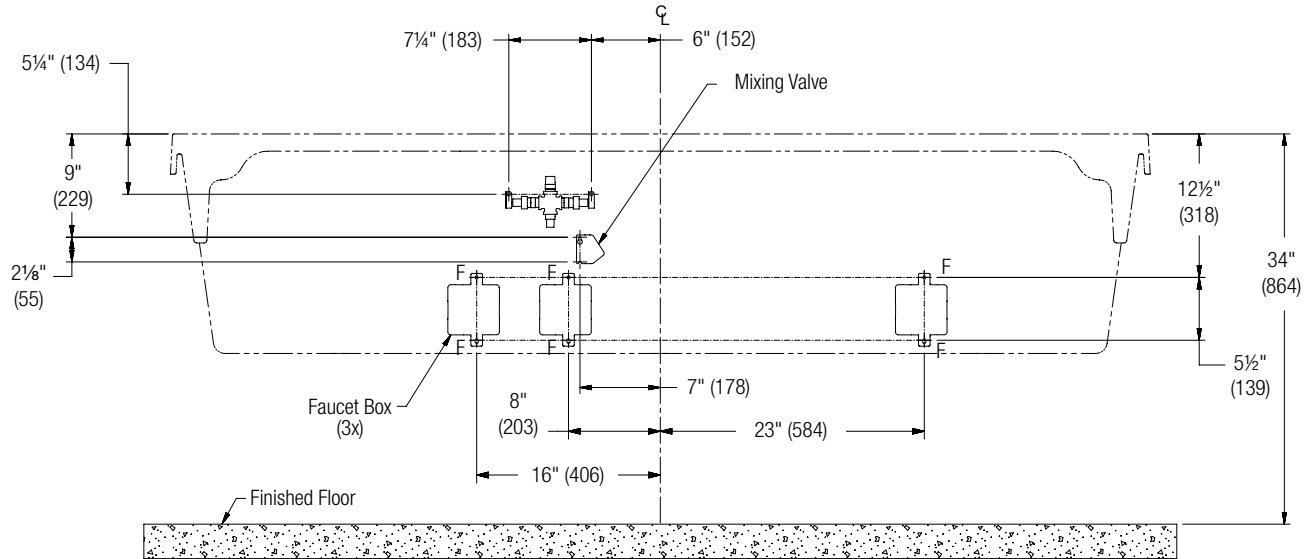

CODE	DESCRIPTION	QTY.
F	#10 Anchors for Faucet Control Box Installation Provide sufficient backing behind the mounting locations.	6



TLX-3 Express® Lavatory System – TLX Series

Plumbing & Electrical Rough-Ins – WBD1


(mm)



Mounting for Standard ADA and TAS height shown.



Combined waste option is not available for use with WBD1 faucet assembly.

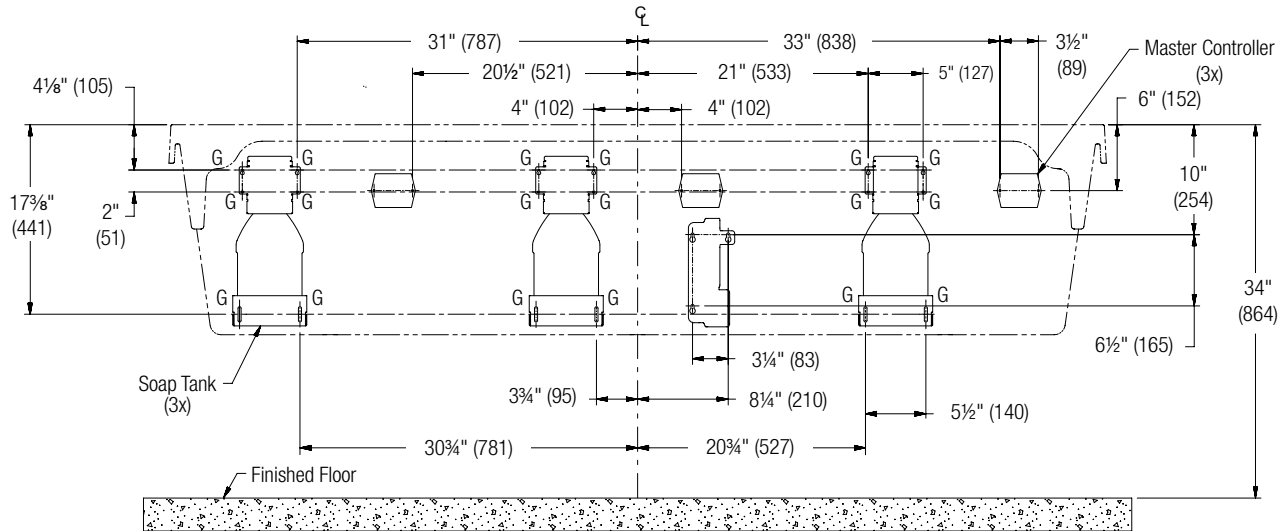

CODE	DESCRIPTION	QTY.
G	#10 Anchors for Soap Tank Bracket (100 lb pull out force) Provide sufficient backing behind the mounting locations.	18



A WATTS Brand


TLX-3 Express® Lavatory System – TLX Series

Rough-Ins – Verge Individual Top-Fill Soap

(mm)



Mounting for Standard ADA and TAS height shown.

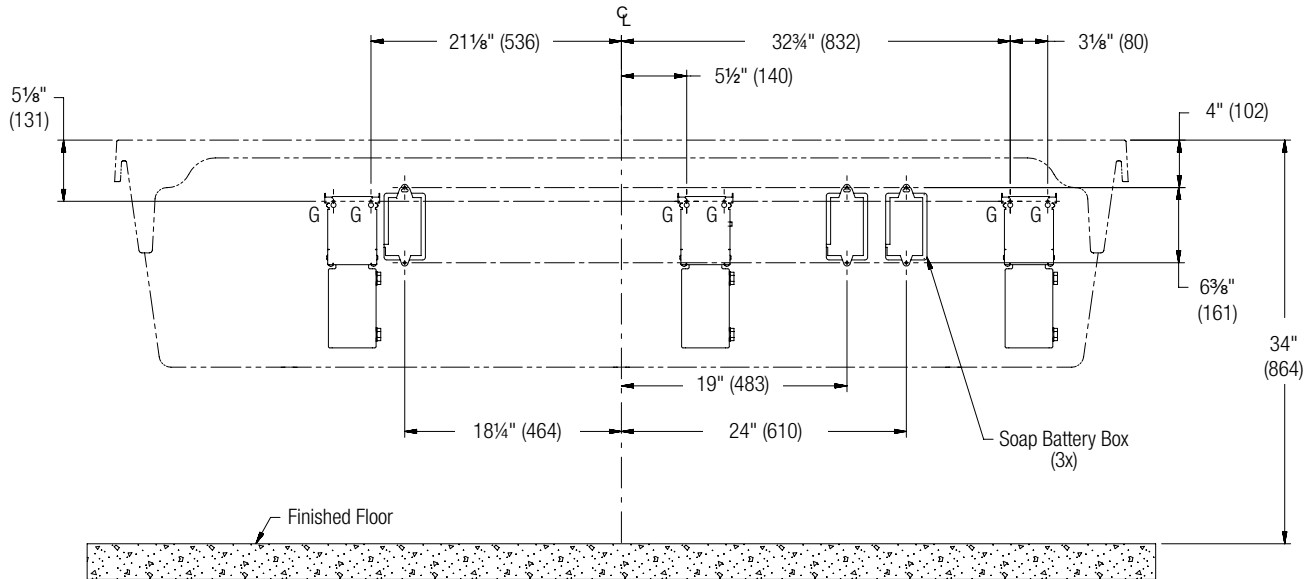


CODE	DESCRIPTION	QTY.
G	#10 Anchors for Soap Tank Installation Provide sufficient backing behind the mounting locations.	6

Rough-Ins – Verge Multi-Feed Soap

(mm)



Mounting for Standard ADA and TAS height shown.

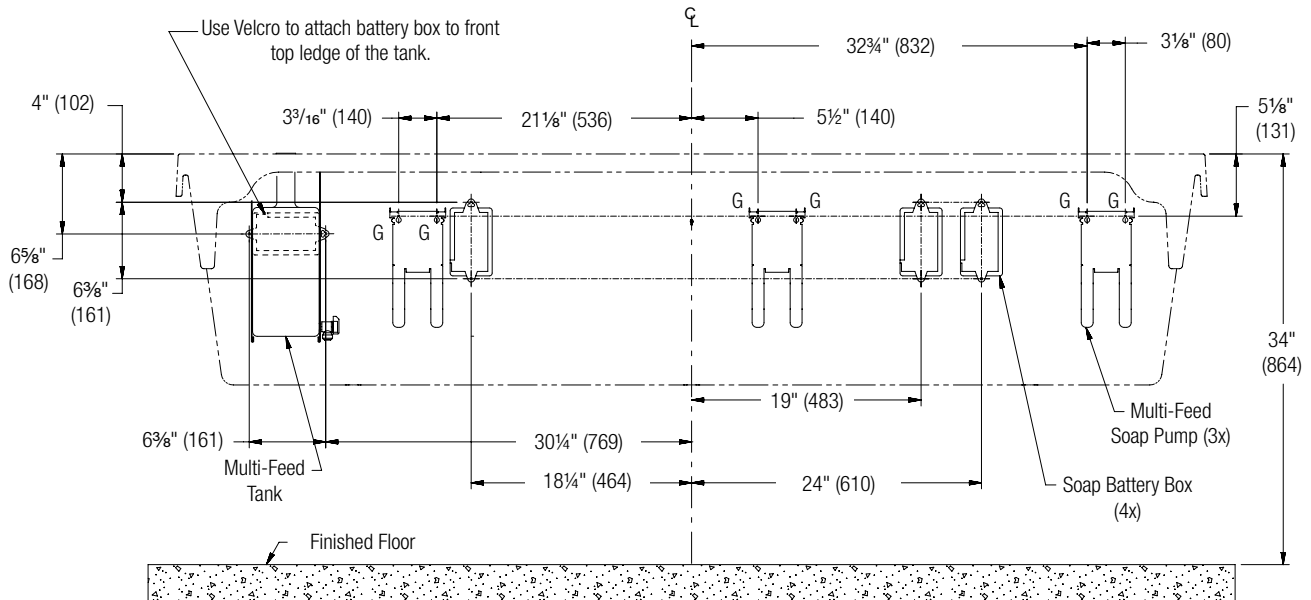

CODE	DESCRIPTION	QTY.
G	#10 Anchors for Soap Tank Installation Provide sufficient backing behind the mounting locations.	6



A WATTS Brand




TLX-3 Express® Lavatory System – TLX Series

Rough-Ins for S17-393 (3-Station In-Wall Lav Carrier) Rough-Ins

(mm)

✓ [In-Wall Lav Carrier Tech Data](#)

Fixture	"A" Finished Floor Dimension
LVAD3, LVQD3, LVSD3	32-11/16"
ELX-3	33-1/16"
GLX-3, TLX-3	32-11/16"

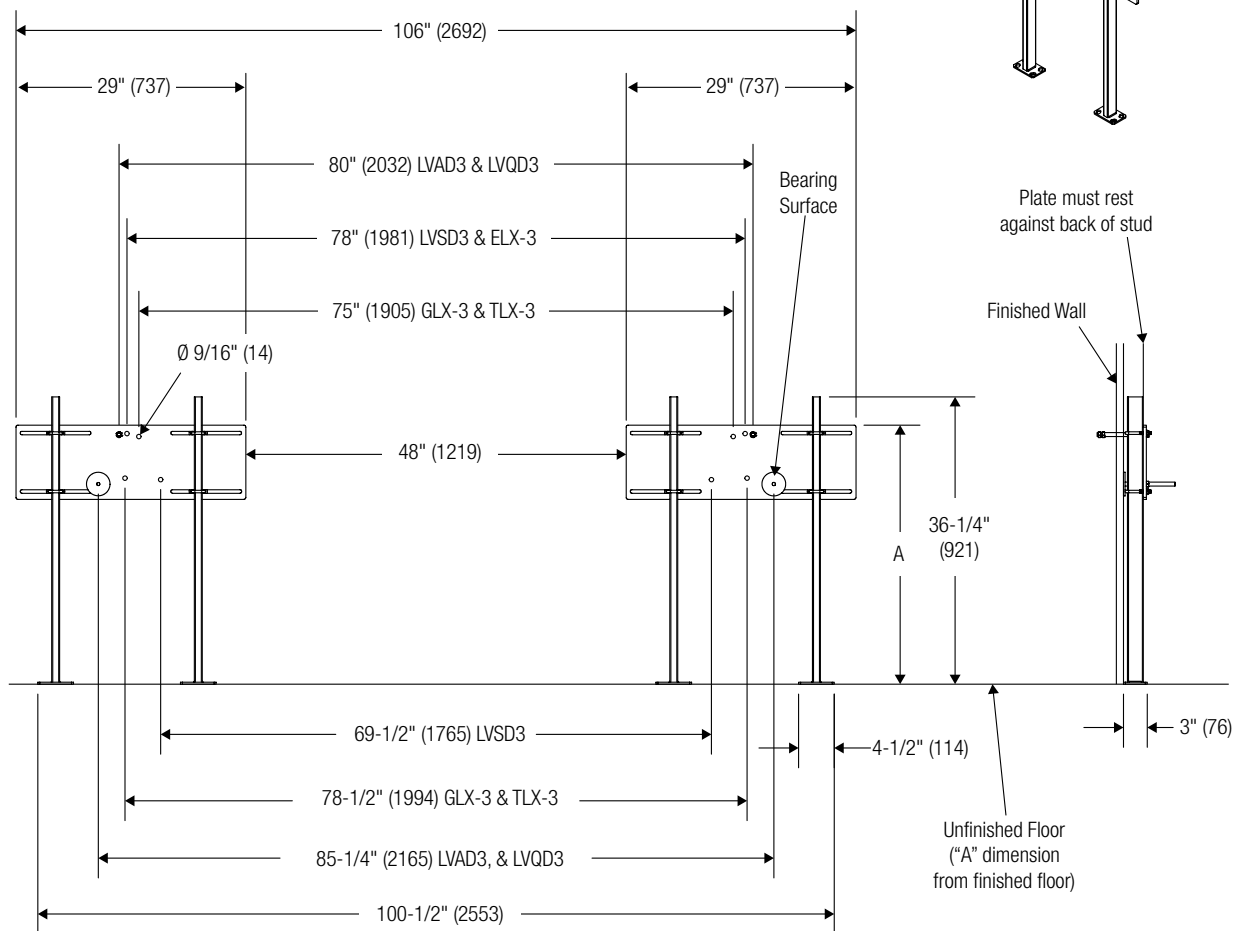



A WATTS Brand

TLX-3 Express® Lavatory System – TLX Series

Models (Must select one)		Soap Dispenser Type (select one)	
Model	Description	☐ WBD1	WashBar Duo (available with faucet type WBD1 only) +
☐ TLX-3	Express Lavatory System TLX-3	☐ 6-3100	Verge Deck-Mounted Soap Dispenser – Crestt Series △
Country of Installation (Must select one)		☐ 6-3300	Verge Deck-Mounted Soap Dispenser – Metro Series △
☐ C1	United States or Canada	☐ 6-3500	Verge Deck-Mounted Soap Dispenser – Linea Series △
Standard Selections (Must select one from each category)		☐ 6-3700	Verge Deck-Mounted Soap Dispenser – Zen Series △
Faucet Type (select one)		☐ WBD1-DO	WashBar Duo Drilling Only
☐ WBD1	WashBar Duo (available with soap dispenser type WBD1 only) +	☐ SDO	1-3/8" Soap Drilling Only
☐ S53-3100	Verge Faucet – Crestt Series	☐ NSD	No Soap Dispenser/No Drilling
☐ S53-3300	Verge Faucet – Metro Series	Soap Activation Type (select one)	
☐ S53-3500	Verge Faucet – Linea Series	☐ R	Touch-Free Activation ◇
☐ S53-3700	Verge Faucet – Zen Series	☐ NONE	No Activation ◆
☐ S53-3100-P	Verge Faucet – Crestt Series, Includes Trim Plate §	Soap Type^ (select one)	
☐ S53-3300-P	Verge Faucet – Metro Series, Includes Trim Plate §	☐ F	Foam Soap
☐ S53-3500-P	Verge Faucet – Linea Series, Includes Trim Plate §	☐ L	Liquid Soap
☐ S53-3700-P	Verge Faucet – Zen Series, Includes Trim Plate §	Soap Fill System◇ (select one)	
☐ WBD1-DO	WashBar Duo Drilling Only	☐ T	Single (top fill at spout)
☐ 4" Set	4" Centerset (1 1/4" Drilling Only)	☐ M	Multi-Feed (shared tank, includes 6-SOAP-MFT Multi-Feed Soap Tank Assembly)
☐ 8" Set	8" Centerset (1 1/4" Drilling Only)	Soap Dispenser Finish Type◇ (select one)	
☐ SHANK	Centershank (1 1/4" Drilling Only)	☐ PC	Polished Chrome
☐ NFD	No Faucet Drilling	☐ BB	Brushed Black Stainless
Faucet Activation Type (select one)		☐ BS	Brushed Stainless
☐ R	Touch-Free Activation △	☐ BZ	Brushed Bronze
☐ NONE	No Activation ▲	☐ BR	Brushed Brass
Water Supply Type (select one)		☐ BN	Brushed Nickel
☐ T	Thermostatic Mixing Assembly (supply hoses and shut-offs included)	Soap Power Supply (select one)	
☐ L	Single Tempered Line Assembly (supply hoses and shut-offs included)	☐ AC	AC Power◇**
Flow Control Type‡ (select one)		☐ BA	Battery – 4x D-cell batteries included per dispenser◇
☐ 3	0.35 gpm Silicone Tip, Multiple Individual Laminar Flow Streams	☐ NONE	No Power Supply◆
☐ 5	0.50 gpm Silicone Tip, Multiple Individual Laminar Flow Streams	Faucet Finish Type‡ (select one)	
Faucet Finish Type‡ (select one)		☐ PC	Polished Chrome
☐ PC	Polished Chrome	☐ BB	Brushed Black Stainless
☐ BB	Brushed Black Stainless	☐ BS	Brushed Stainless
☐ BS	Brushed Stainless	☐ BZ	Brushed Bronze
☐ BZ	Brushed Bronze	☐ BR	Brushed Brass
☐ BR	Brushed Brass	☐ BN	Brushed Nickel
☐ BN	Brushed Nickel	Faucet Power Supply (select one)	
Faucet Power Supply (select one)		☐ AC	AC Power△**
☐ AC	AC Power△**	☐ BA	Battery – 4x AA alkaline batteries included per faucet△
☐ BA	Battery – 4x AA alkaline batteries included per faucet△	☐ NONE	No Power Supply▲
☐ NONE	No Power Supply▲		

** AC power supply will include either individual AC plug-in adapter or 4-way AC splitter assembly depending on configuration.

△ Available with Verge faucet selection only.

▲ Available with faucet drilling only.

◇ Available with Verge soap dispenser selection only.

◆ Available with soap drilling only.

† This color contains large, randomly distributed chips.

‡ Available with Verge faucet or WBD1 selection only.

^ Available with Verge soap or WBD1 selection only.

+ Combined Waste not available with WBD1.

§ Trim plate finish will match Faucet Finish for PC, BB & BS. All other faucet finishes will receive a PC trim plate.



A WATTS Brand

TLX-3

Express® Lavatory System – TLX Series

Standard Selections (Must select one from each category)

Color of Terreon Deck (select one)

NOTE: Click on any swatch to view as a larger image.

Standard Colors

- | | | | |
|--|---|---------------------------------------|---|
| ☐ ALP-WHITE | ☐ Alpine White | ☐ PEBBLE | ☐ Pebble Beach |
| ☐ DRIFT | ☐ Driftwood † | ☐ PEP-WHT | ☐ Peppered White |
| ☐ DS-WHT | ☐ Designer White | ☐ POLAR | ☐ Polar Ice † |
| ☐ E-GRAY | ☐ Empire Gray | ☐ RIVER | ☐ Riverstone |
| ☐ GLACIER | ☐ Glacier | ☐ SAND | ☐ Sandtrap |
| ☐ GRAPH | ☐ Graphite | ☐ S-CREEK | ☐ Stone Creek |
| ☐ LANNON | ☐ LannonStone | ☐ S-MIST | ☐ Silver Mist |
| ☐ MOONSTONE | ☐ Moonstone † | ☐ WHT-SAND | ☐ White Sand |

Access Panel Type (select one)

- ☐ **COAL** Coal

Waste Assembly Type (select one)

- ☐ **CW-CHROME** Chrome-Plated Combined Waste Assembly (1 P-Trap/1 drain connection) +
- ☐ **CW-POLY** Polypropylene Combined Waste Assembly (1 P-Trap/1 drain connection) +
- ☐ **IW-CHROME** Chrome-Plated Individual Waste Assembly (2 P-Trap/2 drain connections)
- ☐ **IW-POLY** Polypropylene Individual Waste Assembly (2 P-Trap/2 drain connections)
- ☐ **NONE** Waste Assembly by Others

** AC power supply will include either individual AC plug-in adapter or 4-way AC splitter assembly depending on configuration.

△ Available with Verge faucet selection only.

▲ Available with faucet drilling only.

◇ Available with Verge soap dispenser selection only.

◆ Available with soap drilling only.

† This color contains large, randomly distributed chips.

‡ Available with Verge faucet or WBD1 selection only.

^ Available with Verge soap or WBD1 selection only.

+ Combined Waste not available with WBD1.

§ Trim plate finish will match Faucet Finish for PC, BB & BS. All other faucet finishes will receive a PC trim plate.

Additional Parts for Purchase

(Must order as separate line item)

Bradley Certified Floor Mounted Carrier

- ☐ **S17-393** 3 station in-wall plate style lav carrier
(Includes 2 hanger plates, 2 structural uprights per plate, hardware)

© 2025 Bradley